


t28

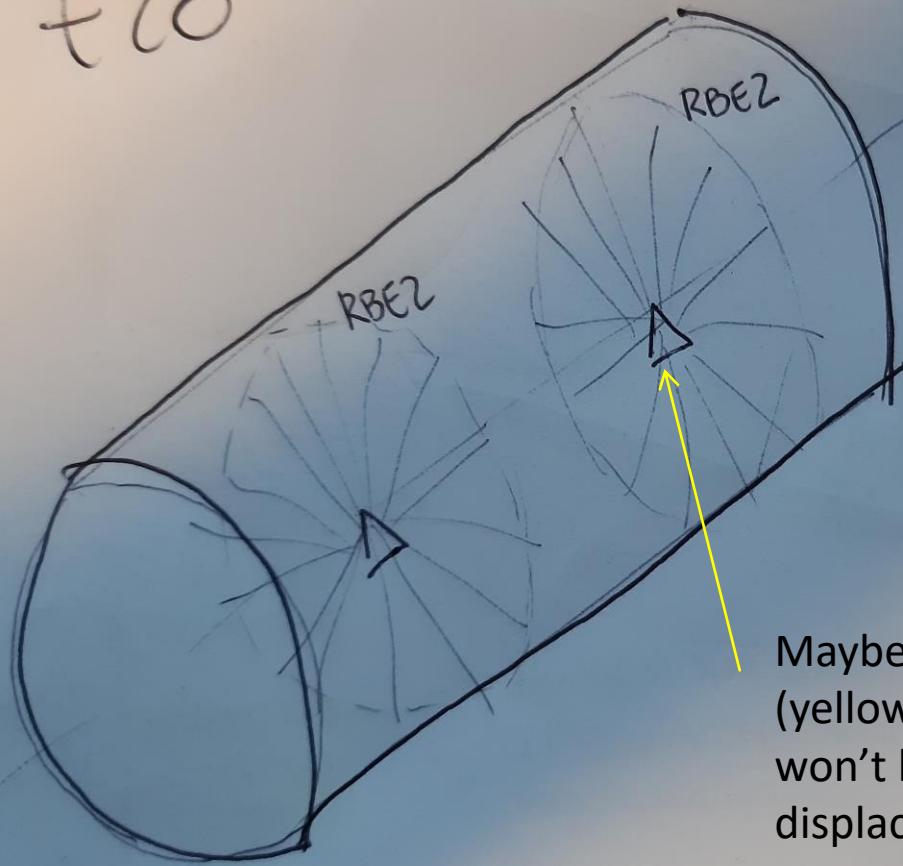

Maybe if I put another constraint (yellow arrow) the component t28 won't be subjected to any displacement and maybe the stress in component t15 will get better...? For example constraining z translation?